





ARGON 18

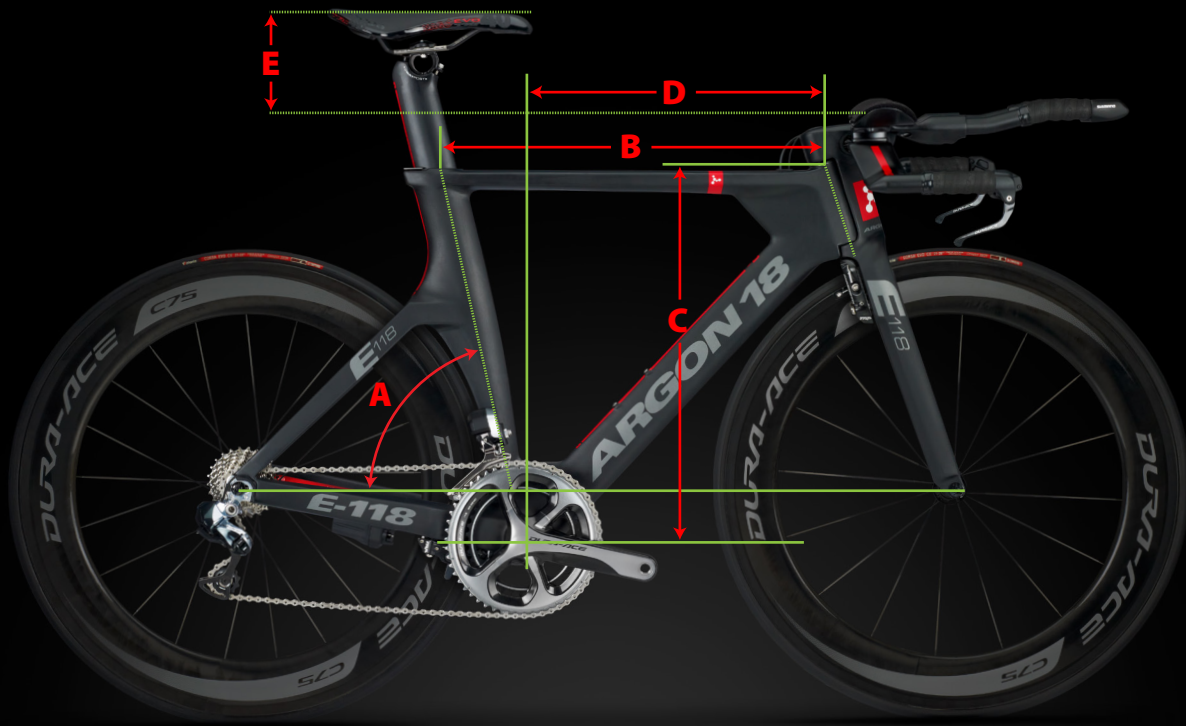

2013 Sizing Charts - TT & TRIATHLON

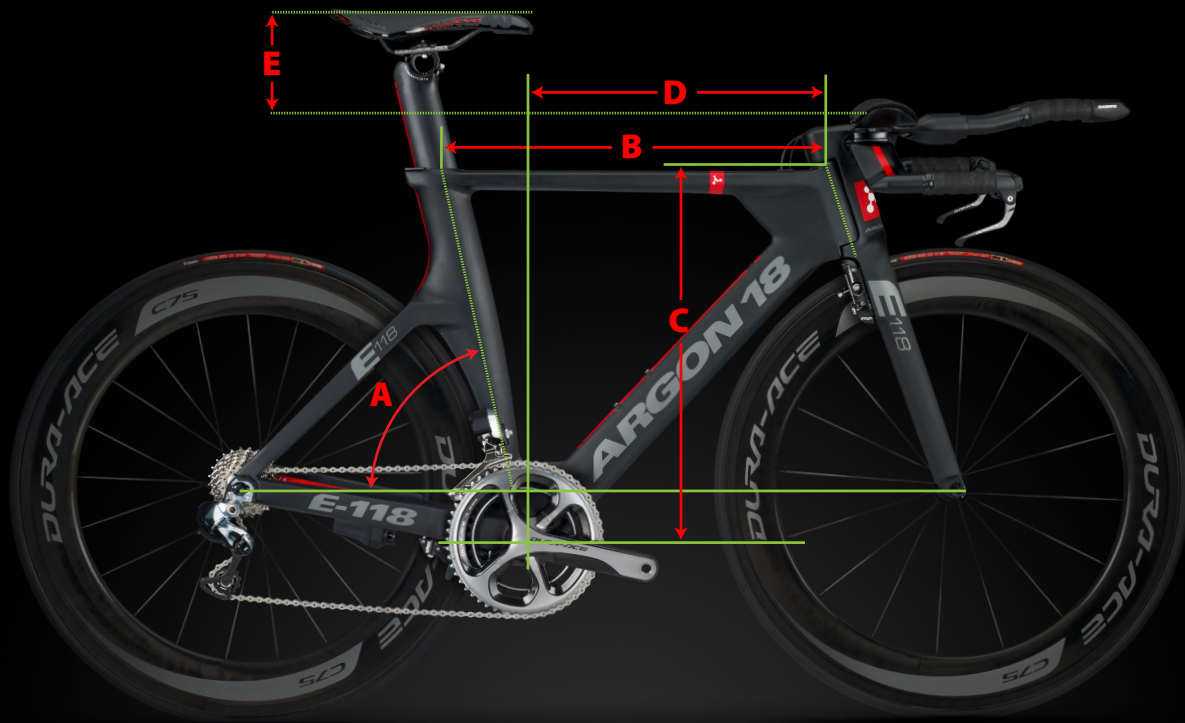


Sizing Chart: E-118

		A	B	C	D	E	
Saddle Height	Suggested Size	Seat Tube Angle	Top Tube	Stack	Reach	Maximum Drop	Minimum Drop
63	XS	76-78	52	490	400	-5.5	4.5
64	XS	76-78	52	490	400	-6.5	3.5
65	XS	76-78	52	490	400	-7.5	2.5
66	XS	76-78	52	490	400	-8.5	1.5
67	XS	76-78	52	490	400	-9.5	0.5
68	XS	76-78	52	490	400	-10.5	-0.5
69	XS/S	76-78	52 / 53,5	490 / 500	400 / 410	-11,5 / -10,5	-1,5 / -0,5
70	XS/S	76-78	52 / 53,5	490 / 500	400 / 410	-12,5 / -11,5	-2,5 / -1,5
71	S	76-78	53.5	500	410	-12.5	-2,5
72	S	76-78	53.5	500	410	-13.5	-3,5
73	S	76-78	53.5	500	410	-14.5	-4,5
74	S/M	76-78	53,5 / 55	500 / 510	410 / 420	-15,5 / -14,5	-5,5 / -4,5
75	M	76-78	55	510	420	-15,5	-5,5
76	M	76-78	55	510	420	-16,5	-6,5
77	M	76-78	55	510	420	-17,5	-7,5
78	M	76-78	55	510	420	-18,5	-8,5
79	M/L	76-78	55 / 56	510 / 540	420 / 425	-19,5 / -16,5	-9,5 / -6,5
80	L	76-78	56	540	425	-17,5	-7,5
81	L	76-78	56	540	425	-18,5	-8,5
82	L	76-78	56	540	425	-19,5	-9,5
83	L	76-78	56	540	425	-20,5	-10,5
84	L	76-78	56	540	425	-21,5	-11,5
85	L	76-78	56	540	425	-22,5	-12,5
86	L	76-78	56	540	425	-23,5	-13,5

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



ARGON 18

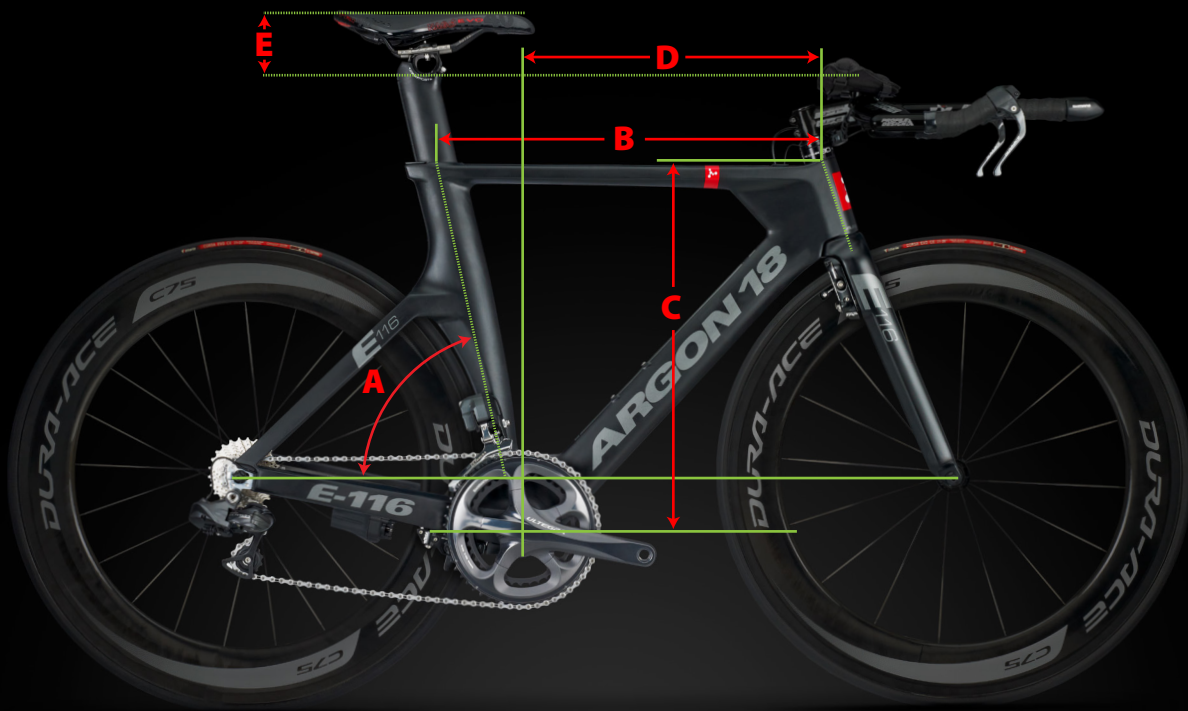


Sizing Chart: E-116

Saddle Height	Suggested Size	A Seat Tube Angle	B Top Tube	C Stack	D Reach	E Maximum Drop	Minimum Drop
63	XS	76-78	52	490	400	-5.5	4.5
64	XS	76-78	52	490	400	-6.5	3.5
65	XS	76-78	52	490	400	-7.5	2.5
66	XS	76-78	52	490	400	-8.5	1.5
67	XS	76-78	52	490	400	-9.5	0.5
68	XS	76-78	52	490	400	-10.5	-0.5
69	XS/S	76-78	52 / 53,5	490 / 500	400 / 410	-11,5 / -10,5	-1,5 / -0,5
70	XS/S	76-78	52 / 53,5	490 / 500	400 / 410	-12,5 / -11,5	-2,5 / -1,5
71	S	76-78	53.5	500	410	-12.5	-2.5
72	S	76-78	53.5	500	410	-13.5	-3.5
73	S	76-78	53.5	500	410	-14.5	-4.5
74	S/M	76-78	53,5 / 55	500 / 510	410 / 420	-15,5 / -14,5	-5,5 / -4,5
75	M	76-78	55	510	420	-15.5	-5.5
76	M	76-78	55	510	420	-16.5	-6.5
77	M	76-78	55	510	420	-17.5	-7.5
78	M	76-78	55	510	420	-18.5	-8.5
79	M/L	76-78	55 / 56	510 / 540	420 / 425	-19,5 / -16,5	-9,5 / -6,5
80	L	76-78	56	540	425	-17.5	-7.5
81	L	76-78	56	540	425	-18.5	-8.5
82	L	76-78	56	540	425	-19.5	-9.5
83	L	76-78	56	540	425	-20.5	-10.5
84	L	76-78	56	540	425	-21.5	-11.5
85	L	76-78	56	540	425	-22.5	-12.5
86	L	76-78	56	540	425	-23.5	-13.5

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



ARGON 18

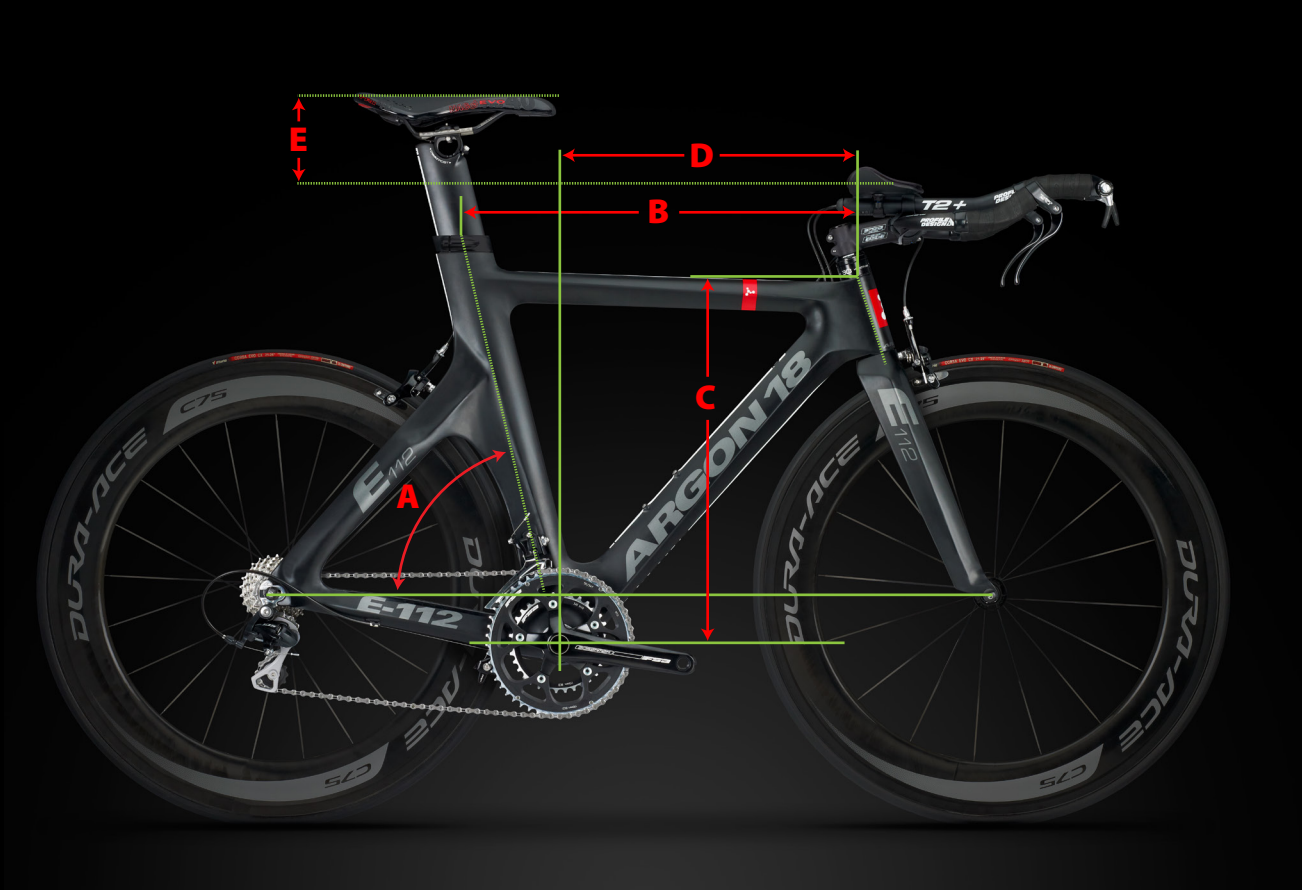


Sizing Chart: E-112

		A	B	C	D	E	
Saddle Height	Suggested Size	Seat Tube Angle	Top Tube	Stack	Reach	Maximum Drop	Minimum Drop
63	XS	76-78	52	485	400	-6	4
64	XS	76-78	52	485	400	-7	3
65	XS	76-78	52	485	400	-8	2
66	XS	76-78	52	485	400	-9	1
67	XS	76-78	52	485	400	-10	0
68	XS	76-78	52	485	400	-11	-1
69	XS/S	76-78	52 / 53,5	485 / 495	400 / 410	-12 / -11	-2 / -1
70	XS/S	76-78	52 / 53,5	485 / 495	400 / 410	-13 / -12	-3 / -2
71	S	76-78	53.5	495	410	-13	-3
72	S	76-78	53.5	495	410	-14	-4
73	S	76-78	53.5	495	410	-15	-5
74	S/M	76-78	53,5 / 55	495 / 505	410 / 420	-16 / -15	-6 / -5
75	M	76-78	55	505	420	-16	-6
76	M	76-78	55	505	420	-17	-7
77	M	76-78	55	505	420	-18	-8
78	M	76-78	55	505	420	-19	-9
79	M/L	76-78	55 / 56	505 / 535	420 / 425	-20 / -17	-10 / -7
80	L	76-78	56	535	425	-18	-8
81	L	76-78	56	535	425	-19	-9
82	L	76-78	56	535	425	-20	-10
83	L	76-78	56	535	425	-21	-11
84	L	76-78	56	535	425	-22	-12
85	L	76-78	56	535	425	-23	-13
86	L	76-78	56	535	425	-24	-14

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



ARGON 18

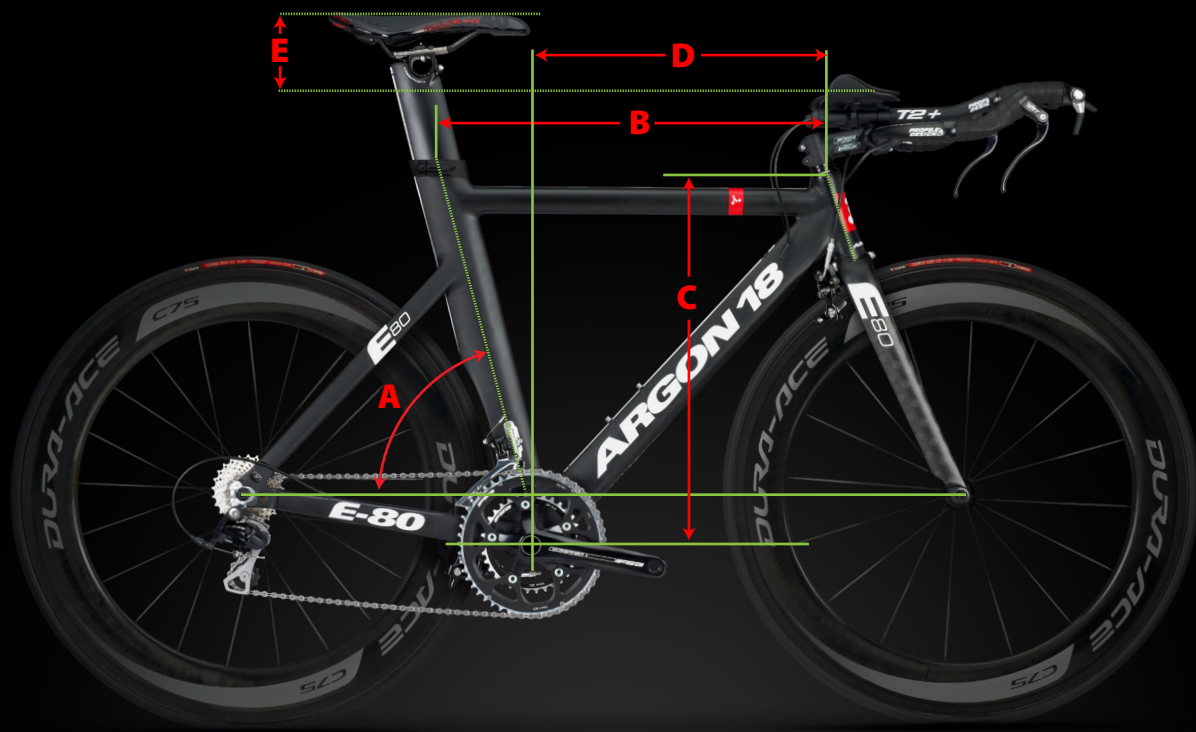

Sizing Chart: E-80

Saddle Height	Suggested Size	A Seat Tube Angle	B Top Tube	C Stack	D Reach	E Maximum Drop	Minimum Drop
63	XS	76-78	52	485	400	-6	4
64	XS	76-78	52	485	400	-7	3
65	XS	76-78	52	485	400	-8	2
66	XS	76-78	52	485	400	-9	1
67	XS	76-78	52	485	400	-10	0
68	XS	76-78	52	485	400	-11	-1
69	XS/S	76-78	52 / 53,5	485 / 495	400 / 410	-12 / -11	-2 / -1
70	XS/S	76-78	52 / 53,5	485 / 495	400 / 410	-13 / -12	-3 / -2
71	S	76-78	53.5	495	410	-13	-3
72	S	76-78	53.5	495	410	-14	-4
73	S	76-78	53.5	495	410	-15	-5
74	S/M	76-78	53,5 / 55	495 / 505	410 / 420	-16 / -15	-6 / -5
75	M	76-78	55	505	420	-16	-6
76	M	76-78	55	505	420	-17	-7
77	M	76-78	55	505	420	-18	-8
78	M	76-78	55	505	420	-19	-9
79	M/L	76-78	55 / 56	505 / 535	420 / 425	-20 / -17	-10 / -7
80	L	76-78	56	535	425	-18	-8
81	L	76-78	56	535	425	-19	-9
82	L	76-78	56	535	425	-20	-10
83	L	76-78	56	535	425	-21	-11
84	L	76-78	56	535	425	-22	-12
85	L	76-78	56	535	425	-23	-13
86	L	76-78	56	535	425	-24	-14

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



ARGON 18